


LITTORA 200 OD STONE 8

Product Sheet

The OD Stone 8 loudspeaker takes the Focal sound into your outdoor spaces!

Its 8" (20cm) unprecedented Iris IP cone and its Aluminium 'M'-shaped inverted dome tweeter deliver faithful sound reproduction and a broad bandwidth. Its integrated transformer also makes it 70/100V compatible and can cover large spaces with no loss of power. Finally, its UV treatment and IP55 certification ensure protection against rain and resistance to dust ingress. With its sophisticated design and finishes that combine elegance with modernity, it's at home in any surroundings. Its finishes (Basalt and Limestone) are textured: resembling rock, they blend seamlessly into outdoor spaces.

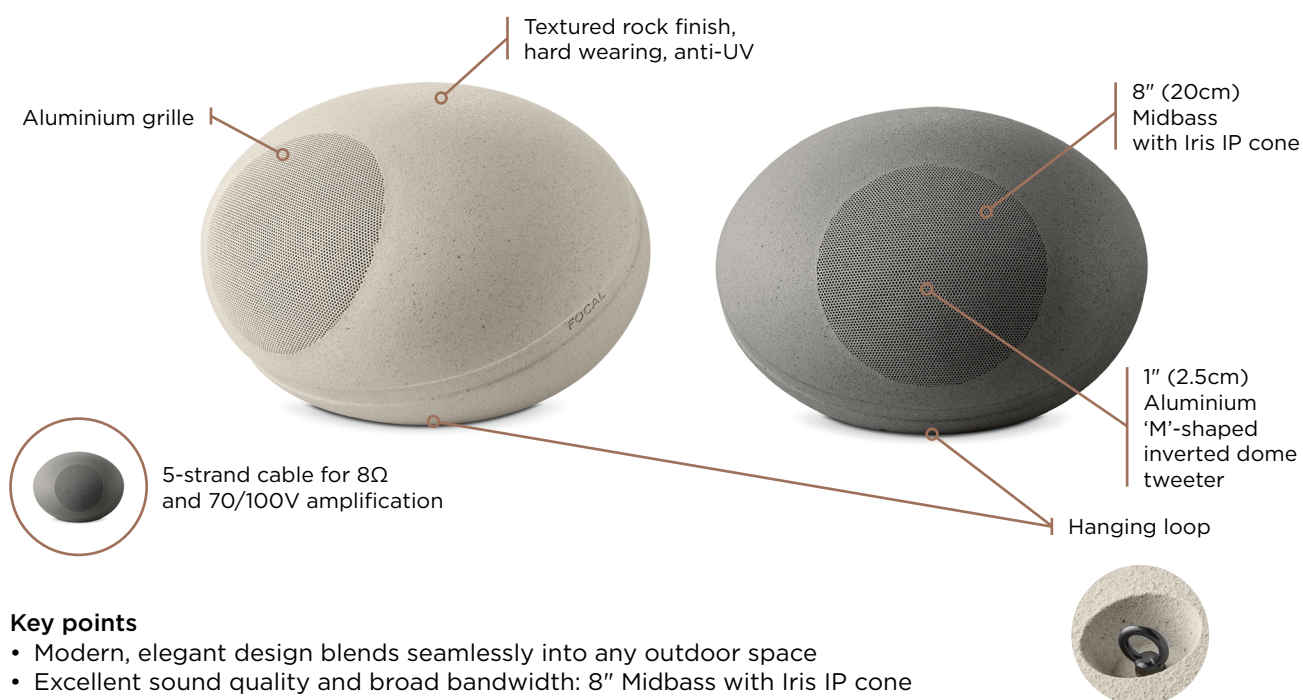

Key points


- Modern, elegant design blends seamlessly into any outdoor space
- Excellent sound quality and broad bandwidth: 8" Midbass with Iris IP cone and 1" Aluminium 'M'-shaped inverted dome tweeter
- Loudspeaker that combines perfectly with an OD Sat 5 and OD Sub 12 system
- Mounted and held in place thanks to its hanging loop
- 8Ω and 70V/100V compatible
- IP55-certified technical design (water and dust)

However, it is strongly recommended to cover your product or store it in a sheltered location (where possible) in the event of bad weather or extreme conditions (snow, hail, etc.)


Type of speaker	2-way outdoor speaker
Speaker drivers	8" (20cm) Midbass with Iris IP cone 1" (2.5cm) Aluminium 'M'-shaped tweeter
Bandwidth	45Hz - 28kHz
Impedance	8Ω
Minimal impedance	5.2Ω at 180Hz
Sensitivity	89dB
Power at 8Ω	75W RMS - 150W Peak
Power at 70/100V	50W
Recommended amp power 8Ω	20W - 150W
Maximum power (70/100V)	80W (40W RMS)
High-pass, slope	80Hz, 24dB/Oct - 80Hz, 24dB/Oct
Temperature tolerance	-20°/65°
IP rating	IP55
Dimensions (W x D x H)	11 ^{3/8"} x 17 ^{3/8"} x 17 ^{3/8"} (29 x 44 x 44cm)
Weight	14.3lbs (6.5kg)



Directionality measurements

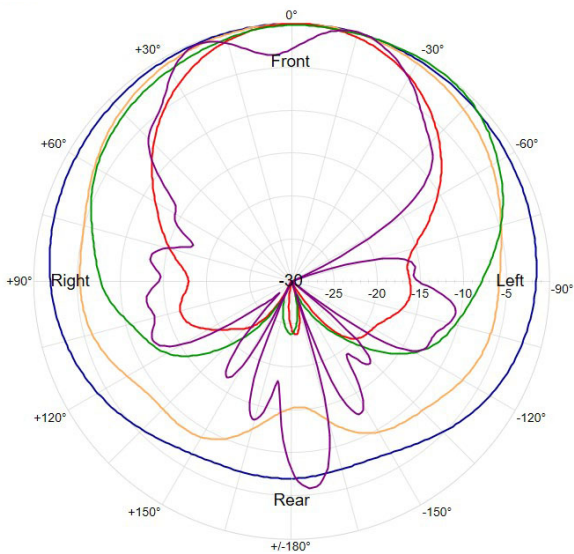

Frequency response

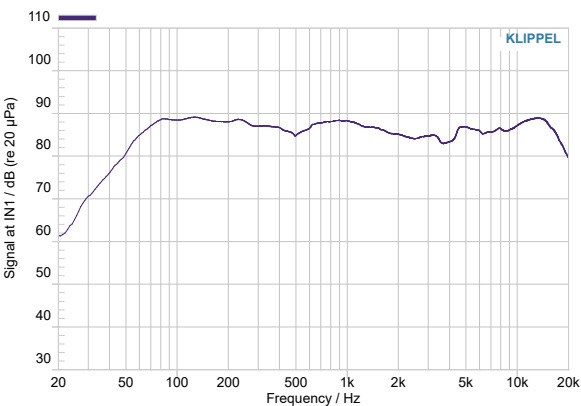

Levels calculation table

Nominal sensitivity		89dB		
Power/Distance	1m	2m	5m	
1W (2.83V)	89dB	83dB	75dB	
20W (12.6V)	102dB	96dB	88dB	
50W (20V)	106dB	100dB	92dB	
100W (28.3V)	109dB	103dB	95dB	

Summary	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz
NPA (2.83V/1m) (dB)	91	90	92	89	88	88	88
Aperture angle at -6dB	180°	180°	180°	-60°/+180°	-0°/+180°	-20°/+180°	-20°/+60°

Coverage area

Area	Recommended quantities
30m ²	1
70m ²	2
115m ²	3
150m ²	4

Angle of coverage

